




Professional Woodworking Machine

ISO 9000 CE UL SP

OAV EQUIPMENT & TOOLS, INC.




Bandsaws

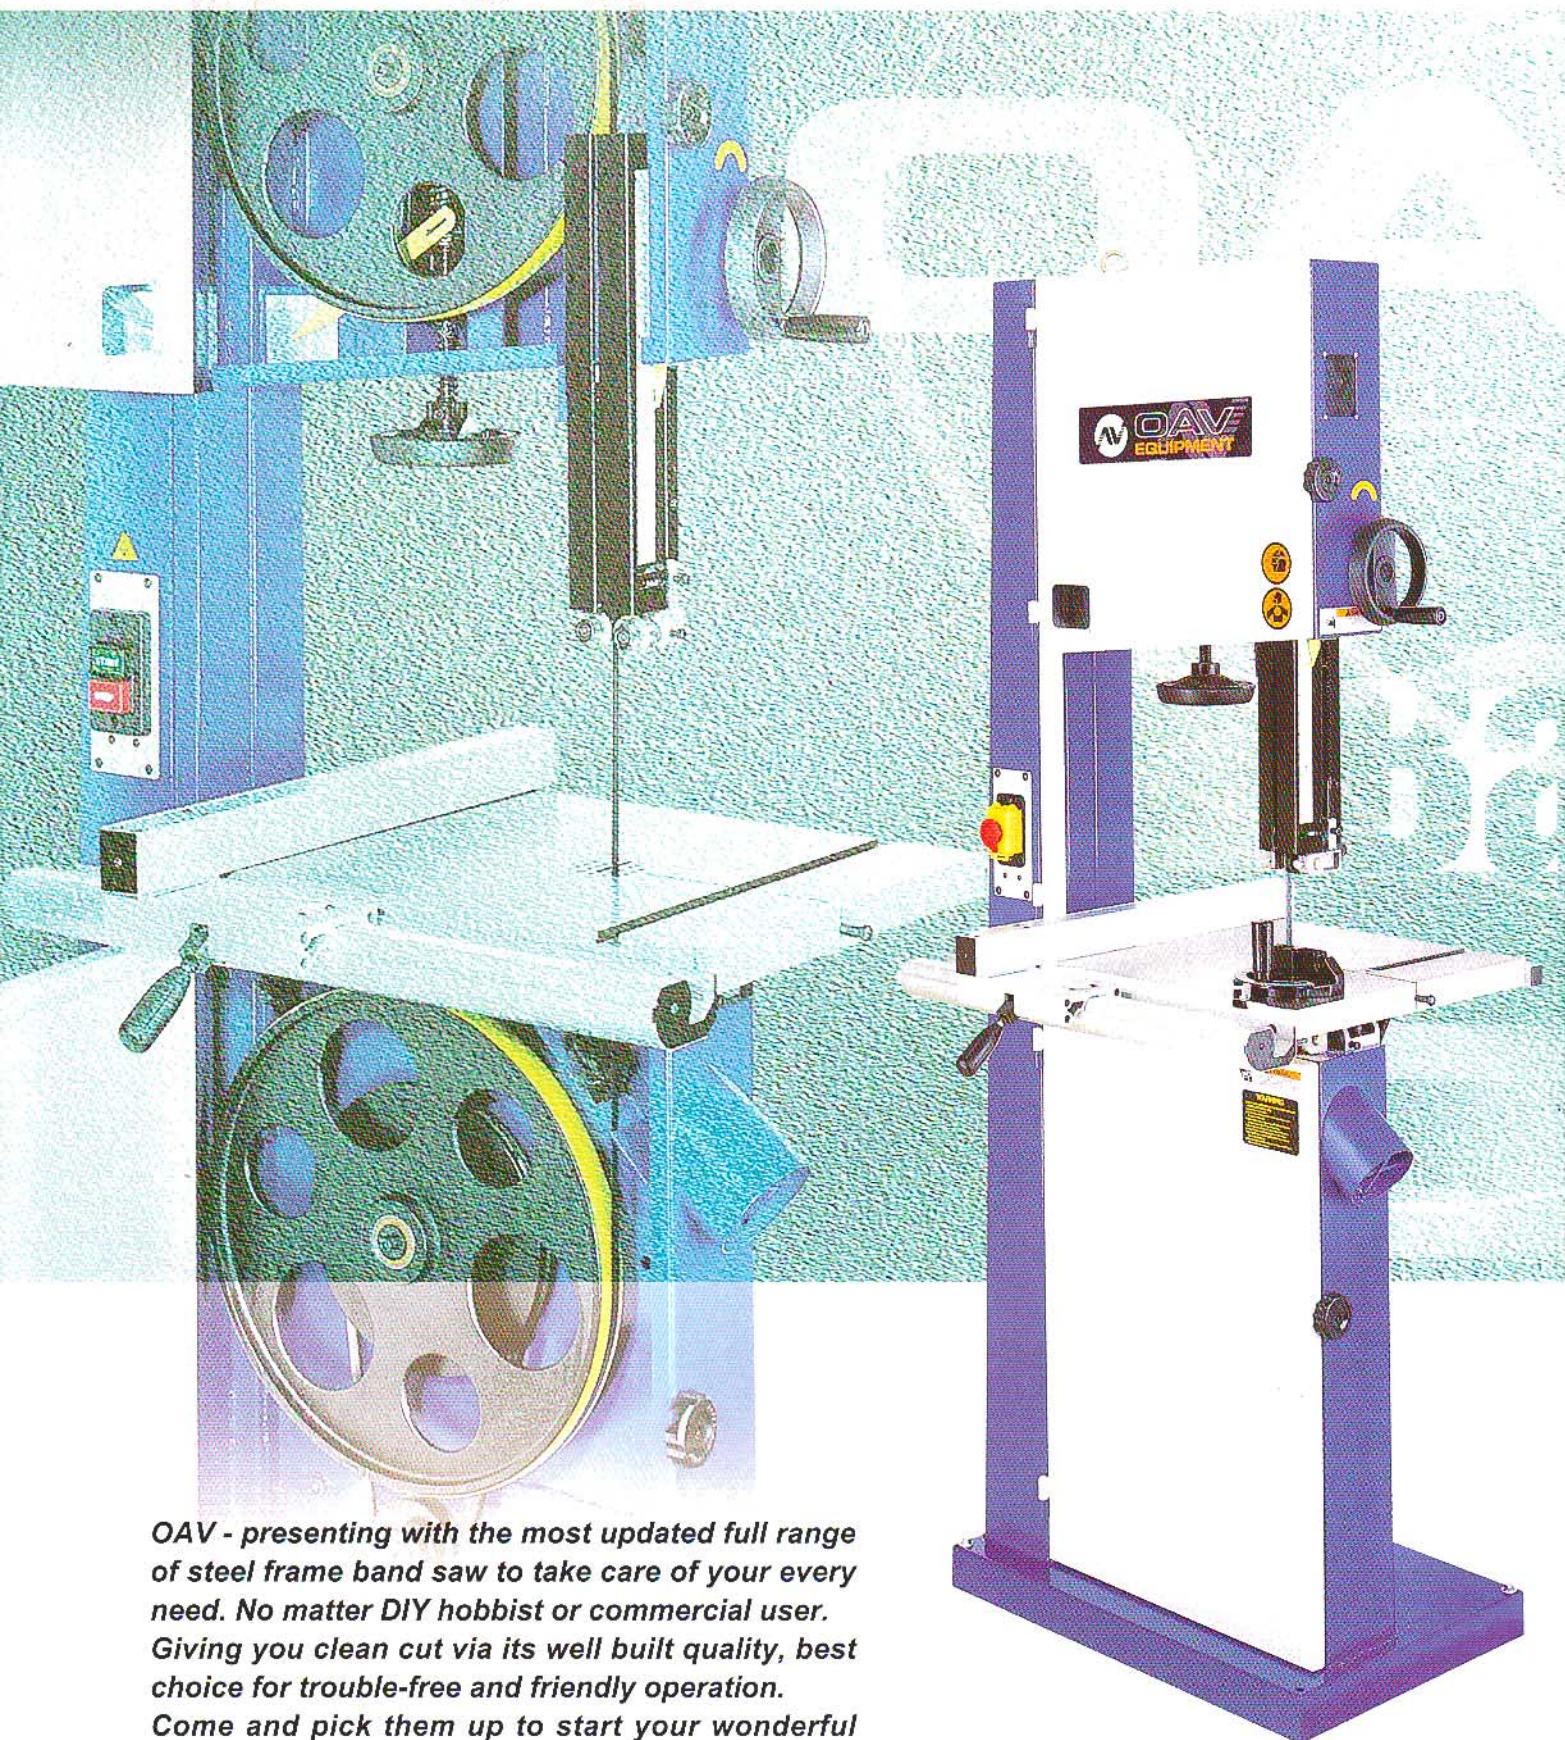


OAV - presenting with the most updated full range of steel frame band saw to take care of your every need. No matter DIY hobbyist or commercial user. Giving you clean cut via its well built quality, best choice for trouble-free and friendly operation. Come and pick them up to start your wonderful woodworking time via having them around. Life is ought to be like this, isn't it ?

Newly available parts (optional)

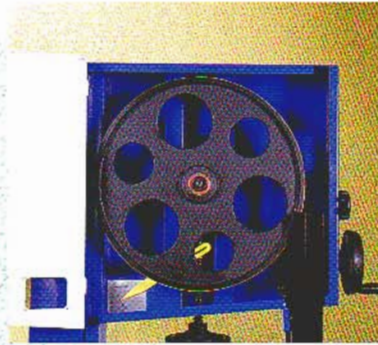

Solid type cast iron wheel

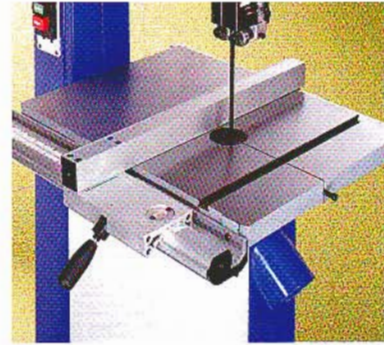

Large rigid ground cast iron table

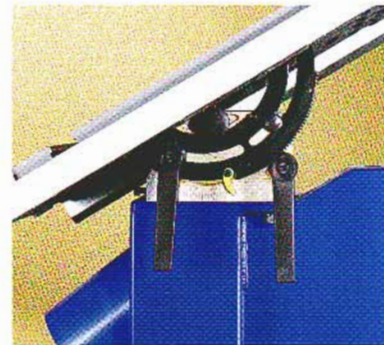


Table tilting micro-adjustment quick handle



● Precise alloy extruded rip fence (CE)
● Sheet metal extension board (optional)

Optional parts and difference between CE and NON-CE


Description	CE	NON-CE
Auto power off switch	Y	N
Link door	Y	N
Switch	electronic braking magnetic switch	on / off push button
Fence	higher type	regular one
Blade guide	block or ball bearing	
Miter gauge	alloy or steel	
Motor	steel or alloy housing	
Table	normal / large ground cast iron or extension board	
Wheels	alloy or cast iron	




Upper and lower ball bearing blade guide system

Newly available parts (optional)


- Large rigid ground cast iron table
- 4" (100mm) dust port with built in impeller device
- Dual speeds(SBW-3501B)
- Alloy housing motor
- Precisely balanced solid type cast iron wheel
- Newly improved blade guide system

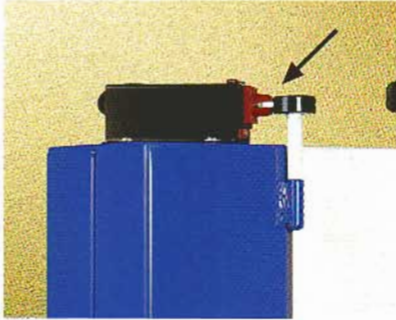

Auto power off switch (CE)

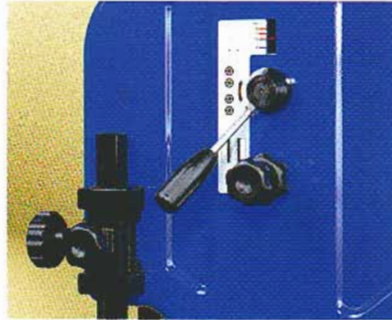

User friendly quick-release saw blade changing system

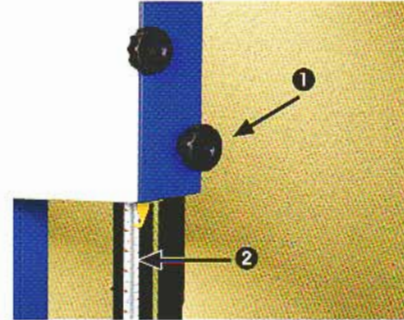

① Cutting height adjusting knob
② Dual scale height indicator



Easy read-out magnifying scale and alloy extruded rip fence



Non-Slip groove belt for smooth operation



Built in dust collection device (optional)



Upper and lower blade guide system (SBW-3501C)



Upper and lower ball bearing blade guide system (SBW-3501B)



Heavy table tilting adjustment mechanism



Precisely balanced solid type cast iron wheel (optional)



houfbewerkingsmachines

MEMPHIS B.V.

representative

SBW-3501B CE




SBW-3501C CE



Model	SBW-3501B	SBW-3501C
Motor	3/4 HP (0.55KW)	3/4 HP (0.55KW)
Table Size	14" x 14" (356 x 356 mm)	14" x 14" (356 x 356 mm)
Wheel Size	14" (356mm)	14" (356mm)
Cutting Height	8" (200mm)	8" (200mm)
Max. Cutting Width	13 5/8" (346mm)	13 5/8" (346mm)
Max. Cutting (Rip Fence)	12 5/8" (320mm)	12 5/8" (320mm)
Saw Blade Length	100 3/4" (2562mm)	97 1/2" (2477mm)
Saw Blade Width	1/8" to 3/4" (3mm to 19mm) (Standard 3/8")	3/8" to 1" (9.5mm to 25.4mm) (Standard 3/8")
Saw Blade Speed	(3100SFPM) (945m/min)	(3100SFPM) (945m/min)
Table Tilting	Left 10° / Right 45° 20°(CE)	Left 10° / Right 45° 20°(CE)
Table Height from Ground	42" (1066mm)	42" (1066mm)
Dust Chute Diameter	φ 4"(100 mm) x 1	φ 4"(100 mm) x 1
Machine Size(LxWxH)	17 1/2 x 24 x 69" (445x610x1753mm)	17 1/2 x 24 x 69" (445x610x1753mm)
Packing Size (LxWxH)	48 1/4 x 23 x 18" (1227x572x432mm)	47 1/4 x 23 x 18" (1210x572x432mm)
N.W. / G.W.	172/183 lbs (78/83 kgs)	172/183 lbs (78/83 kgs)
Ctn Qty / 20' / 40'	88 sets/ 185 sets	88 sets/ 185 sets


Features:



Auto power off micro switch (CE)



User friendly quick-release saw blade changing system




- Cutting height adjusting wheel
- Blade tracking see through window



- Precisely balanced spoke design wheel
- Blade tension indicator




Upper and lower blade guide system




Easy read-out magnifying scale and alloy extruded rip fence



Table tilting micro-adjustment mechanism



Miter gauge for various angle cutting (optional)



Dual speeds design for multiple purpose cutting



Built in 4" (100mm) dust port x 2 units



- Powerful induction motor
- Alloy housing (optional)

Model	SBW-4300	SBW-4800	SBW-5300
Motor	2HP	2HP	2HP
Table Size	17" x 17" (430 x 430 mm)	19" x 19" (480 x 480 mm)	21" x 21" (530 x 530 mm)
Wheel Size	17" (430mm)	19" (480mm)	21" (530mm)
Cutting Height	12" (300mm)	12" (300mm)	12" (300mm)
Max. Cutting Width	16 1/4" (410mm)	18 1/4" (462mm)	20 1/4" (514mm)
Max. Cutting (Rip Fence)	14 5/8" (370mm)	16 5/8" (422mm)	18 5/8" (474mm)
Saw Blade Length	131 3/4" (3345mm)	143 3/8" (3640mm)	152 1/4" (3865mm)
Saw Blade Width	3/8" to 1" (9.5mm to 25.4mm) (Standard 1/2")	3/8" to 1" (9.5mm to 31.8mm) (Standard 3/4")	1/8" to 1" (9.5mm to 31.8mm) (Standard 3/4")
Saw Blade Speed	(3300/1600SFPM) (841/393M/min)	(3700/1700SFPM) (939/439M/min)	(4000/1900SFPM) (1037/485M/min)
Table Tilting	Left 10° / Right 45° 20° (CE)	Left 10° / Right 45° 20° (CE)	Left 10° / Right 45° 20° (CE)
Table Height from Ground	37 1/2" (950mm)	37 1/2" (950mm)	37 1/2" (950mm)
Dust Chute Diameter	φ 4" (100 mm) x 2	φ 4" (100 mm) x 2	φ 4" (100 mm) x 2
Machine Size(LxWxH)	32x26x74" (820x670x1880 mm)	36x30x78" (920x770x1990 mm)	40x31x80" (1020x790x2040 mm)
Packing Size (LxWxH)	30x20x80" (770x510x2040 mm)	34x20x85" (870x510x2170 mm)	37x20x87" (950x510x2270 mm)
N.W. / G.W.	266 / 321 lbs (121 / 146 kgs)	319 / 383 lbs (145 / 174 kgs)	359 / 431 lbs (163 / 196 kgs)
Ctn Qty / 20' / 40'	33 sets / 68 sets	27 sets / 56 sets	23 sets / 49 sets